

ingenico

LINK/2500 Companion LE

Your smart, sleek and simple payments solution



- Specifically engineered for flexibility to accept all payment methods including NFC/Contactless, Apple Pay and Samsung Pay
- Slim and robust, dedicated to mobility
- Shorten time to market by leveraging TELIUM applications into a smart companion



The Link/2500 brings payment acceptance solution to any mobile business.

Pocket-sized, light weight and robust design, the Link/2500 is the perfect business acceptance point

Payments anywhere and anytime


- Bluetooth and WiFi

Power management improved and battery autonomy boosted thanks to the energy-efficient components

Multiple alternative payment methods supported

- EMV Chip & PIN, contactless, magstripe or digital wallets

Raising the bar on security with PCI PTS certification

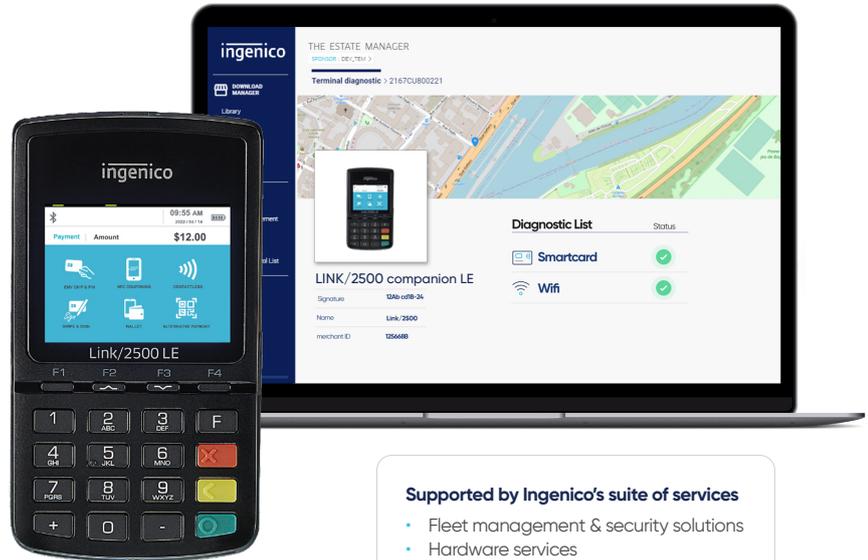

Supported by Ingenic's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

			LINK/ 2500 SLIM	LINK/ 2500 STANDARD				LINK/ 2500 SLIM	LINK/ 2500 STANDARD
OS		• Telium TETRA	✓	✓	Terminal Connections	• USB Type C	• Host & Slave (3K insertions)	✓	✓
Memory	• Internal	• 256 MB Flash, 256 MB RAM	✓	✓	Terminal size	• L x W x H	• 129 x 70 x 13 mm (5.07 x 2.75 x 0.51") • 129 x 70 x 17 mm (5.07 x 2.75 x 0.67")	✓	N/A
Processor	• Application & Crypto processor	• Cortex A7	✓	✓	Power supply	• Terminal	• 5V 1A	Option	✓
Card readers	• Magstripe • Smart Card • Contactless	• ISO 1/2/3, 100K lifespan • EMV Level 1, 50K lifespan • EMV / iISO14443	✓ ✓ ✓	✓ ✓ ✓	Batteries	• Li-ion	• 1200mAH (removable) • 600mAH	N/A ✓	✓ N/A
SIM / SAM		• up to 2	N/A	Option	Weight	• Full featured	• 120g (4.23oz) • 155g (5.46oz)	✓ N/A	N/A ✓
Display	• Colour	• 2.4" colour display, backlit, QVGA (240x320 pixels)	✓	✓	Security		• PCI PTS 6.x online & offline certified	✓	✓
Keypad	• Mechanical	• 20 keys, raised marking	✓	✓	Environment	• Charging Temperature • Operating Temperature • Storage Temperature • Operating Humidity	• 0°C to +40°C (32°F to 104°F) • -10°C to +50°C (14°F to 122°F) • -20 to +55°C (-4°F to 131°F) • 85% non-condensing at 40°C (104°F)	✓ ✓ ✓ ✓	✓ ✓ ✓ ✓
Audio	• Buzzer		✓	✓	Accessory	• Cable	• USB A to USB C: 1.5m	✓	✓
Terminal Connectivity	• LAN • Apple IAP Chip	• Bluetooth • WiFi (Dual band)	✓ N/A ✓	✓ ✓ ✓					

