

ingenico

AXIUM DX6000

Revolutionize in-store efficiency with
accessibility-driven portable commerce solution



- High-level performance with a long-lasting battery, large keypad, and front and rear cameras
- Boosted power with best-in-class processor and memory capacity
- Fresh business opportunities with leading-edge Android apps under Android 10
- Top-level security with Android & PCI PTS V6 compliancy
- Supported by AXIUM platform to unlock the full potential of digital commerce



Powered by Android 10, the AXIUM DX6000 redefines in-store digital experiences, prioritizing accessibility while enhancing performance, productivity, and security.

The power of Android 10.
Harness the power of the Appstore.

Powerful processing to increase speed and output

- Boosted memory (Up to 2GB RAM 16GB FLASH)
- High speed processor (ARM Quad-core cortex A53)

Large 4" touchscreen and ergonomic interface

Designed for accessibility

- Integrated speaker which could provide vocal assistance
- Real mechanical keypad with raised marking


Payment anywhere and anytime (4G, 3G, GPRS, Bluetooth and WiFi)

Powerful cameras

- Front camera (0,3MP)
- Rear camera (up to 5MP)

Long-lasting battery for the lengthy working day (up to 3350mAh, 24.12Wh)

Fast integrated printer

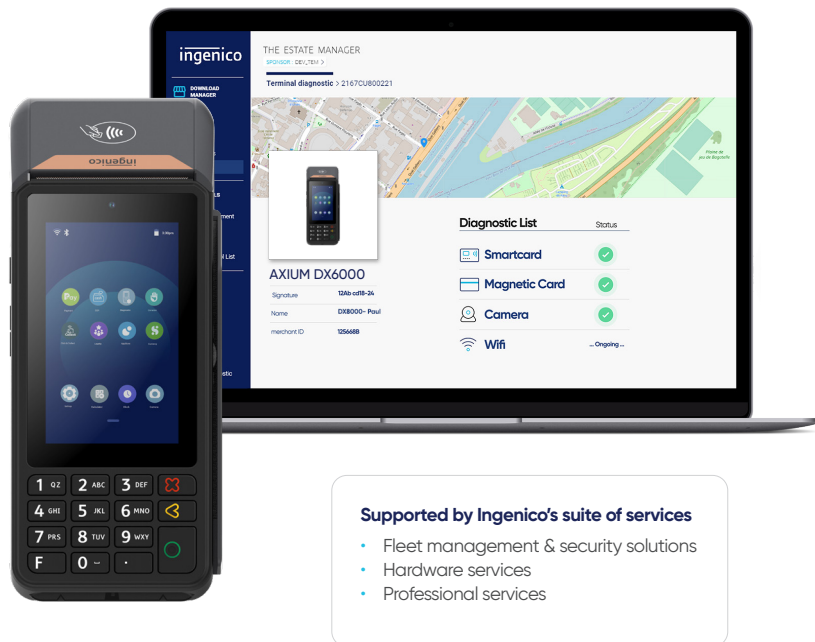

Supported by Ingenic's suite of services

- Fleet management & security solutions
- Hardware services
- Professional services

Specifications

OS	<ul style="list-style-type: none"> • Android 	<ul style="list-style-type: none"> • Android 10 Security OS 	✓
Memory	<ul style="list-style-type: none"> • Internal • External 	<ul style="list-style-type: none"> • 16GB Flash, 2GB RAM • 8GB Flash, 1GB RAM • MicroSD Card slot 	Option ✓ ✓
Processor	<ul style="list-style-type: none"> • Application processor • Crypto processor 	<ul style="list-style-type: none"> • Cortex Quad-core A53, 1.3GHz • Security core Cortex 32bit, 160MHz 	✓ ✓
Card readers	<ul style="list-style-type: none"> • Magnetic card reader • Smart card reader • NFC/contactless 	<ul style="list-style-type: none"> • Support ISO 1/2/3 track data, bi-directional swiping • EMV Contactless L1 3.1 spec compliant; support ISO / IEC 14443 Type A / B 	✓ ✓ ✓
SAM /SIM slots	<ul style="list-style-type: none"> • 4 slots (SAM + SIM) 	<ul style="list-style-type: none"> • 2 SIM + 2 SAM • 1 SIM + 3 SAM 	✓ Option
Display	<ul style="list-style-type: none"> • Color / capacitive multi-touch 	<ul style="list-style-type: none"> • 4", 400 x 800 px 	✓
Printer	<ul style="list-style-type: none"> • Integrated thermal printer 	<ul style="list-style-type: none"> • Diameter: 40mm 	✓
Keys & Keypad	<ul style="list-style-type: none"> • Power key & volumes keys • Physical Keypad 	<ul style="list-style-type: none"> • 1 Power key & 2 volumes keys • 15 numeric and alphanumeric keys 	✓ ✓
Audio	<ul style="list-style-type: none"> • Support audio play • Headphone 	<ul style="list-style-type: none"> • Support audio play • USB C 	✓ ✓
Connectivity	<ul style="list-style-type: none"> • WAN • LAN 	<ul style="list-style-type: none"> • 4G fallback 3G and GPRS • Bluetooth 4.2 • WiFi IEEE8.2.11 a/b/g/n/ac 2.4G and 5G 	✓ ✓ ✓
Connections	<ul style="list-style-type: none"> • USB 	<ul style="list-style-type: none"> • USB Type C 	✓
Data capture	<ul style="list-style-type: none"> • Positioning • Rear camera • Front camera 	<ul style="list-style-type: none"> • Tracking GPS, GLONASS, BEIDOU • 5MP, autofocus, flash, code scanning • 2MP, autofocus, flash, code scanning • 0.3MP, fixed focus camera, code scanning 	✓ Option ✓ ✓
Battery	<ul style="list-style-type: none"> • Li-ion 	<ul style="list-style-type: none"> • 3350mAh / 7.2V, 24.12Wh • 2600mAh / 7.2V, 18.7Wh 	Option ✓
Size	<ul style="list-style-type: none"> • Terminal only 	<ul style="list-style-type: none"> • 198 x 80 x 66 mm (7.79 x 3.14 x 2.59") 	✓
Weight	<ul style="list-style-type: none"> • Terminal + battery 	<ul style="list-style-type: none"> • 450g (15.87oz) 	✓
Security	<ul style="list-style-type: none"> • PCI PTS V6 		✓
Environment	<ul style="list-style-type: none"> • Operating Temperature • Storage Temperature • Operating Humidity 	<ul style="list-style-type: none"> • -10°C to +50°C (14°F to 122°F) • -20°C to +70°C (-4°F to 158°F) • 5% to 90% non-condensing 	✓ ✓ ✓

