

ingenico

AXIUM DX4000 Portable

Seamless checkout on the spot



Fresh business opportunities with leading edge Android apps under Android 10



Portable solution for business efficiency anytime, anywhere



Top-level security with Android & PCI PTS V6 certification



Supported by Ingenico Services for an optimized efficiency in estate and security management



Always running at peak performance, fully connected, **AXIUM DX4000**

Portable meets merchant's daily needs.

The power of Android 10. Harness the power of the Appstore.

Performance optimized at affordable price

Payment anywhere and anytime

(4G, 3G, GPRS, Bluetooth and WiFi)


All methods of payment accepted (EMV Chip & PIN, contactless, magstripe or digital wallets and QR-code based payment)

Fast integrated printer

Long-lasting battery for the lengthy working day (2500mAh, 15.8Wh)

Raising the bar on security with PCI PTS v6 and Ingenico security tools

Supported by the suite of services provided by Ingenico 360 platform from device management to Managed Services

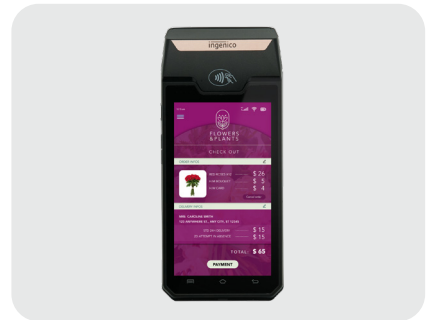

Specifications

OS	<ul style="list-style-type: none"> Android 	<ul style="list-style-type: none"> Android 10 Security OS 	✓
Memory	<ul style="list-style-type: none"> Internal 	<ul style="list-style-type: none"> 8GB Flash 1GB RAM 16GB Flash 2GB RAM 	✓
	<ul style="list-style-type: none"> External 	<ul style="list-style-type: none"> MicroSD Card Slot 	Option ✓
Processor	<ul style="list-style-type: none"> Application processor 	<ul style="list-style-type: none"> Cortex Quad-core A53, 1.4GHz 	✓
	<ul style="list-style-type: none"> Crypto processor 	<ul style="list-style-type: none"> Security core SC300, 192MHz 	✓
Card readers	<ul style="list-style-type: none"> Magnetic card reader 	<ul style="list-style-type: none"> Support ISO 1/2/3 track data, bi-directional swipin 	✓
	<ul style="list-style-type: none"> Smart card reader 	<ul style="list-style-type: none"> EMV L1 and support ISO7816 	✓
	<ul style="list-style-type: none"> NFC/contactless 	<ul style="list-style-type: none"> EMV Contactless L1 3.1 certified; support ISO / IEC 14443 Type A/B 	✓
	<ul style="list-style-type: none"> 3 slots (SAM + SIM) 	<ul style="list-style-type: none"> 2 SIM + 1 SAM 1 SIM + 2 SAM 	Option ✓
Display	<ul style="list-style-type: none"> Color / capacitive multi-touch 	<ul style="list-style-type: none"> 5", 854 x 480 px 	✓
Printer	<ul style="list-style-type: none"> Integrated thermal printer 	<ul style="list-style-type: none"> Diameter: 40mm 	✓
Keys & Keypad	<ul style="list-style-type: none"> Power key & volumes keys 	<ul style="list-style-type: none"> 1 Power key & 2 volumes keys 	✓
	<ul style="list-style-type: none"> Capacitive screen keys 	<ul style="list-style-type: none"> Physical screen keys: Menu, Home, Back 	✓
Audio	<ul style="list-style-type: none"> Speaker 	<ul style="list-style-type: none"> Internal speaker 	✓
	<ul style="list-style-type: none"> Buzzer 	<ul style="list-style-type: none"> Internal buzzer 	✓
	<ul style="list-style-type: none"> Microphone 	<ul style="list-style-type: none"> Internal microphone 	Option ✓

Connectivity	<ul style="list-style-type: none"> WAN LAN 	<ul style="list-style-type: none"> 4G fallback 3G and GPRS Bluetooth 4.2 support BLE WiFi IEEE802.11 b/g/n 2.4GHz 	✓
	<ul style="list-style-type: none"> USB 	<ul style="list-style-type: none"> USB Type C 	✓
	<ul style="list-style-type: none"> Positioning Rear camera 	<ul style="list-style-type: none"> Tracking GPS, GLONASS, BEIDOU 0.3MP, fixed focus, fill light, code scanning 2MP, fixed focus 	Option ✓
Battery	<ul style="list-style-type: none"> Li-ion 	<ul style="list-style-type: none"> 2200mAh / 7.2V, 15.8Wh (equal to 4270mAh / 3.7V) 	✓
Size	<ul style="list-style-type: none"> Terminal only 	<ul style="list-style-type: none"> 177.6 x 80 x 56.5 mm (6.63 x 3.15 x 2.22") 	✓
Weight	<ul style="list-style-type: none"> Terminal + battery 	<ul style="list-style-type: none"> 430g (15.17oz) 	✓
Security	<ul style="list-style-type: none"> PCI 	<ul style="list-style-type: none"> PCI PTS V6 Certified 	✓
Environment	<ul style="list-style-type: none"> Operating temperature 	<ul style="list-style-type: none"> -10°C to +50°C (14°F to 122°F) 	✓
	<ul style="list-style-type: none"> Storage temperature 	<ul style="list-style-type: none"> -20°C to +70°C (-4°F to 158°F) 	✓
	<ul style="list-style-type: none"> Operating humidity 	<ul style="list-style-type: none"> 10% to 90% non-condensing 	✓

